

DC ISOLATION SWITCH

EDS6EL DC Isolator(1500V) IP66 Enclosure



Aluminum box

Product Application

IP66 enclosure series - EDS6EL/50 DC Isolator is developed for 1000V commercial solar rooftops and installed between photovoltaic panels and inverters to guarantee safety. EDS6EL/50 DC Isolator has optional aluminum box and plastic box (optional breathable valve) and is produced by patented arc interrupter and UL certified materials to ensure the highest quality and solar DC safety.

Product Benefits

- IP66, UV Resistance
- Arcing Time < 1ms
- Earth Terminal
- IEC60947-3, AS60947.3
- 2 Poles, 4 Poles Available(Single | Double String)
- DC-PV2 / DC-21B: 55A up to 1500VDC

Aluminum box

- Metal material, with anti-corrosion, anti-explosion resistance against IK10, can adapt to harsh environments



Plastic box


Select Code

E	D	S	□	□	/	□	/	□	□
1	2	3	4	5	6	7	8		

Code	Name	Description
1	ASwiche brand	E
2	DC	D
3	Isolation Switch	S
4	Series	6: Series 6
5	Mounting Type	EL: Plastic enclosure box ELA: Aluminum enclosure box
6	1000V Rated Current	13: 13A 40: 40A 20: 20A 50: 50A 25: 25A
7	Pole	2:2P 4:4P 4T/4B/4S
8	Lockable/Unlock	R:lockable Nill: unlockable

EDS6EL DC Isolator(1500V) IP66 Enclosure

Appearance Introduction

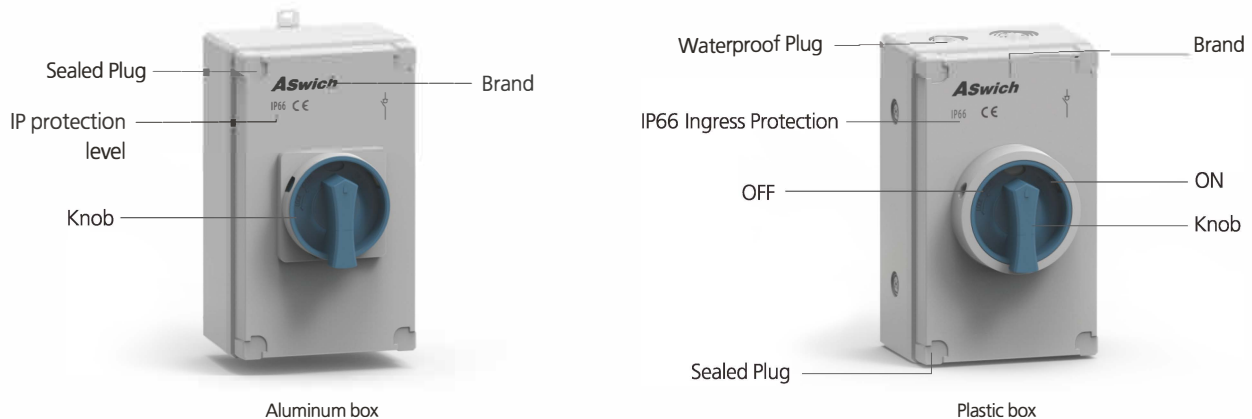

Technical Data

Data according to IEC/EN60947-3: AS60947.3, UL508i, GB/T14048.3. Utilization category DC-PV1/DC-PV2.


Main Parameters			13	20	25	40	50
Rated insulation voltage	Ui	V	1500	1500	1500	1500	1500
Rated thermal current	Ith	A	32	40	55	55	55
Rated impulse withstand voltage	Uimp	V	8000				
Rated short-time withstand current (1s)	Icm	A	780				
Rated short-time making capacity	Icm		1200A				
Maximum cable cross sections (incl. jumper)							
Solid or standard		mm²	4-16				
Flexible		mm²	4-16				
Flexible (+ multicore cable end)		mm²	4-16				
Torque							
Tightening torque terminal screws M4.		Nm	1.2-1.8				
Tightening torque single hole mounting nut M16		Nm	2.0-2.3				
Tightening torque knob screws M3		Nm	0.5-0.7				
Switching on or off torque		Nm	0.9-1.3				
General parameters							
Knob positions			9 o'clock OFF, 12 o'clock, ON				
Electrical Life	Actual		3000 Cycles				
	Standard		300 Cycles				
Mechanical Life	Actual		10000 Cycles				
	Standard		10000 Cycles				
Number of DC poles			2 or 4 (6/8 geek choice)				
Distance of contacts (per pole)		mm	8				
Operation temperature		°C	-40 to +85				
Store temperature		°C	-40 to +85				
Pollution degree			3				
Overvoltage category			III				
IP rating of shafte and mounting nut			IP66				

DC ISOLATION SWITCH

EDS6EL DC Isolator(1500V) IP66 Enclosure


Number of layers	Voltage/Current (DC-PV1)				
	600Vdc	800Vdc	1000Vdc	1200Vdc	1500Vdc
2/4	32	26	13	10	5
	40	30	20	12	6
	55	45	25	15	8
	/	50	40	30	20
	/	55	50	40	30
4T/B/S	/	/	32	26	13
	/	/	40	30	20
	/	/	55	40	30
	/	/	/	/	45
	/	/	/	/	50

Dimension and Mounting

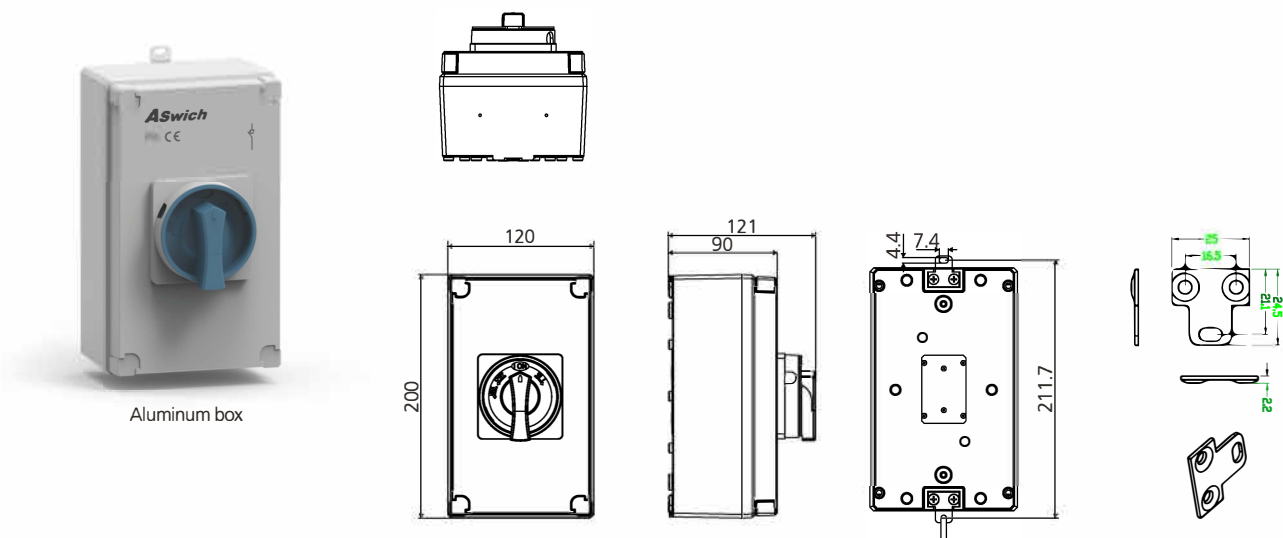

Aluminum box

Dimension and Mounting

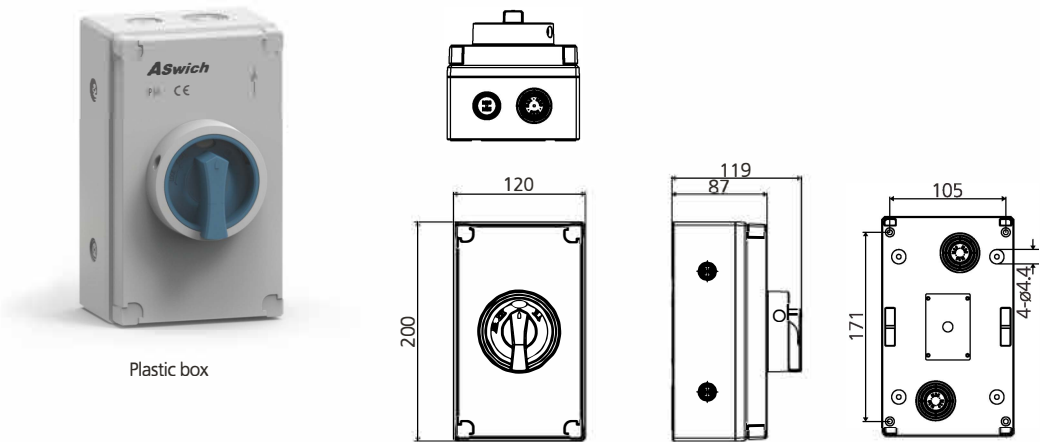

Plastic box